

SUPERSHINE

TRATAMENTO
formatos 300x300 ÷ 1600x3800 mm

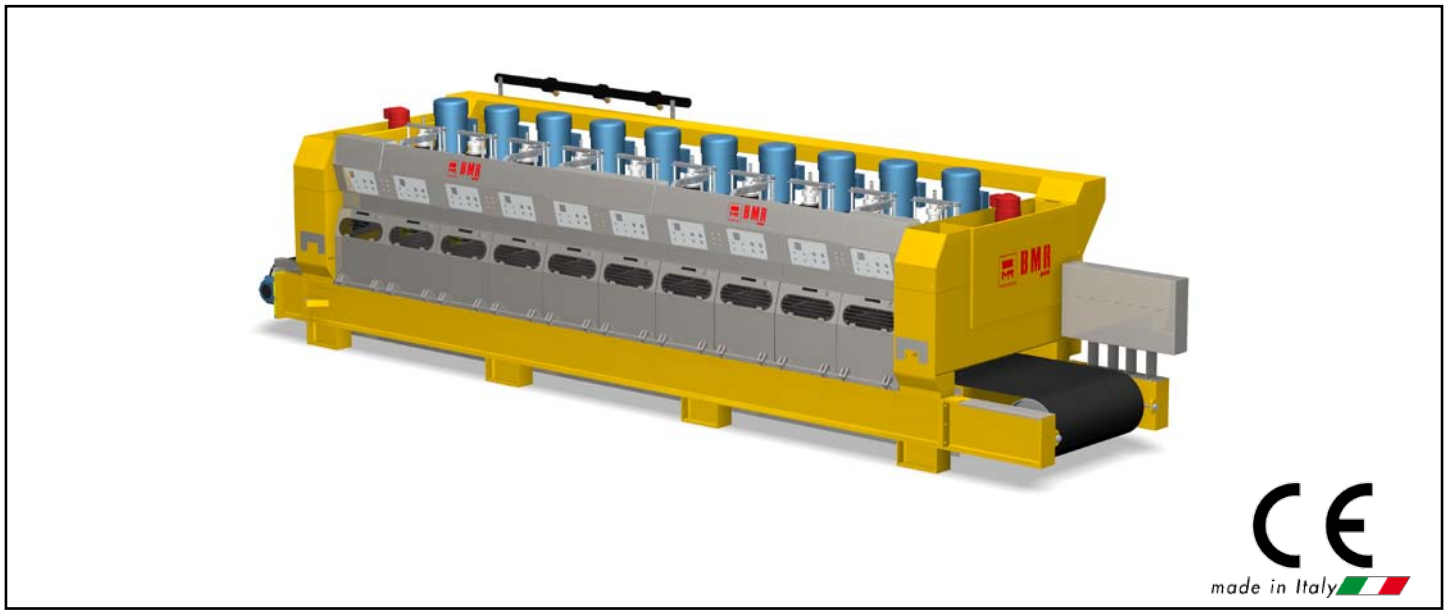

4 CONFIGURAÇÕES DIFERENTES para trabalhar a mais ampla gama de formatos:

1	SUPER SHINE 720 até ao formato 600mm
2	SUPER SHINE 1000 até ao formato 1000mm
3	SUPER SHINE 1200 até ao formato 1200mm
4	SUPER SHINE 1600 até ao formato 1600mm

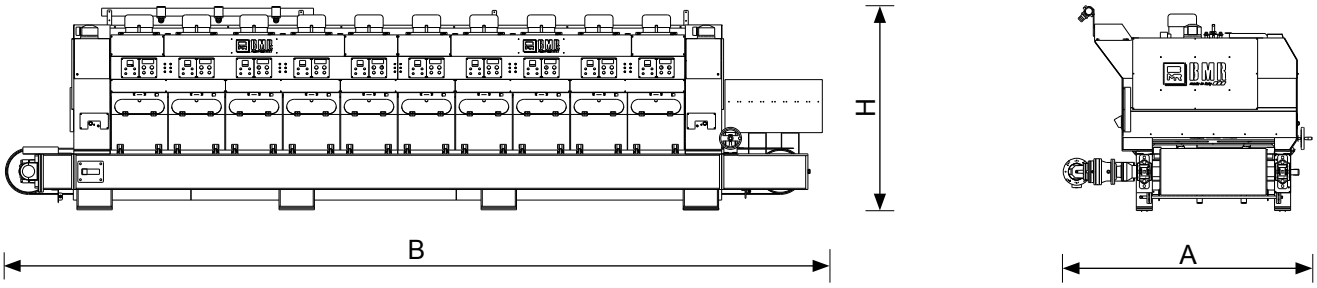

SUPERSHINE	Unidade de medida	720	1000	1200	1600
Número de cabeças	**n.**	**10**	**10**	**10**	**10**
Dimensões (AxBxH)	mm.	2400x9070x2200	2700x9070x2200	2900x9070x2200	3200x9070x2200
Peso da Máquina	Kg	11500	15800	18200	22000
Potência total instalada	kW	165	165	165	165
Ar Comprimido	l/min.	60	60	60	60
Água Refrigerante	l/min.	195	195	195	195
Espessura máx	mm.	30	30	30	30
Fto min/max	mm.	300/700	300/1000	300/1200	300/1600


Descrição do processamento:

As **10 CABEÇAS SATÉLITES** de 6 ferramentas Ø 580mm têm as seguintes funções:
- as 7 primeiras servem para a **APLICAÇÃO E LUSTRAÇÃO** do produto
- as outras 3 são para a **LAVAGEM**
- a **REGULAGEM AUTOMÁTICA** da pressão das cabeças e da **DOSAGEM** do produto METCLEAN 1006

O resultado é uma garantia de **CONTINUIDADE na QUALIDADE** do produto acabado.



Cabeça-satélite

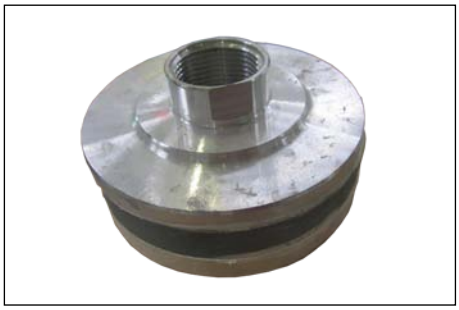

Ferramenta



Bombas de Dosagem do Produto

PRODUTO METCLEAN 1006

O processo de aplicação do produto METCLEAN 1006 cria uma reação química, mecânica, física que agindo nas corretas condições de pressão e temperatura, **PENETRA EM PROFUNDIDADE NOS POROS DA PLACA** conferindo-lhe **BRILHO, PROTEÇÃO ANTIPISOTEAMENTO e ANTICORROSÃO POR ÁCIDO.**

METCO R&D

Revision 1
dated January 27, 2014

METCLEAN 1006

Surface treating agent

DESCRIPTION
Metclean 1006 is a water based product containing a modified silica as active ingredient.
Metclean 1006 is particularly suitable for filling the pores and imparting anti-acid properties to polished or lapped ceramic wares.
Surfaces treated with Metclean 1006 show high gloss, improved resistance to stain and easy-to-clean properties.
Metclean 1006 secures a semi-permanent finishing to treated surfaces.

APPLICATION
Metclean 1006 should be used undiluted on perfectly clean and dry surfaces.
The product is applied dropwise by the machine as lubricating agent in lapping phase.
The amount of Metclean 1006 to be used for each application is about 80 gr/m^2.
Shake well before use.

PERFORMANCE TEST
The assessment of the resistance to stains should be carried out on perfectly dry treated surfaces, normally 24h after the application of the product.

TECHNICAL INFORMATION

Appearance:	Pale liquid
Odour:	light
Solid residue:	15,0 – 25,0%
pH:	1,4 – 2,4
Density:	1,08 – 1,13g/cm^3

STORAGE CONDITIONS

Shelf life:	12 months in the sealed original containers
Storage temp.:	5°- 45°C

Store in the original containers in a dry, cool and well ventilated area. Keep away from direct sunlight or other sources of heat.
The product forms gels when exposed to air. After opening, use the product within a short period.

SAFETY
Metclean 1006 is intended for industrial use. The usual precautions used for chemical products should be respected. Good general and local ventilation of working areas is suggested. Local aspiration on the workplaces is recommended.
Please, refer to the Safety Data Sheet for additional information

PACKAGING
Kg 25 – Plastic cans
Kg 500 – Plastic tanks
Kg 1000 – Plastic tanks

METCO SRL
via Galilei, 4 – 40050 Monteveglio (BO) – ITALY
Ph. +39 (0) 51 83 03 93 - Fax +39 (0) 51 83 00 66
VAT No. / 02174841201 - REA BO 441387 - CAP. SOC. € 1.450.000 i.v.
www.metcoitalia.com / info@metco.it



Brilho acima de 90 Gloss



Resistente ao pisoteamento



Resistente à ação de ácidos



Resistente à ação de ácidos