

SUPERSHINE

TRATAMIENTO
formatos 300x300 ÷ 1600x3800 mm

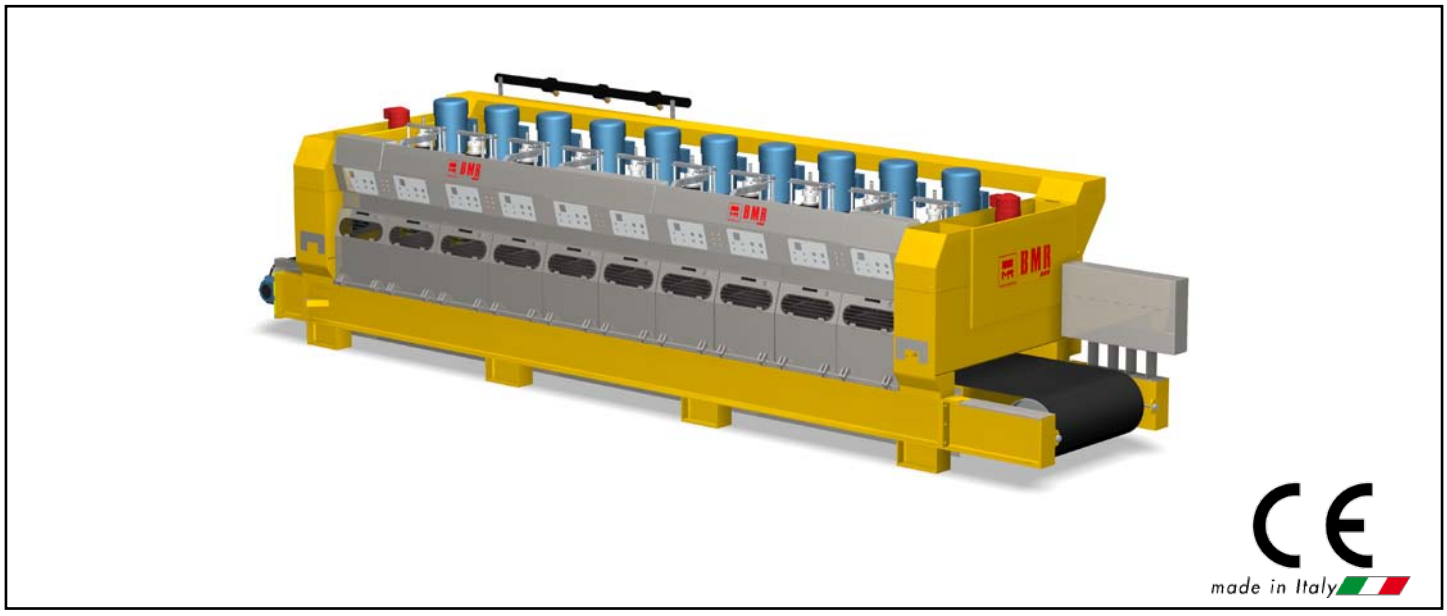

4 CONFIGURACIONES DIFERENTES para trabajar la gama más amplia de formatos:

1	SUPER SHINE 720 hasta el formato 600mm
2	SUPER SHINE 1000 hasta el formato 1000mm
3	SUPER SHINE 1200 hasta el formato 1200mm
4	SUPER SHINE 1600 hasta el formato 1600mm

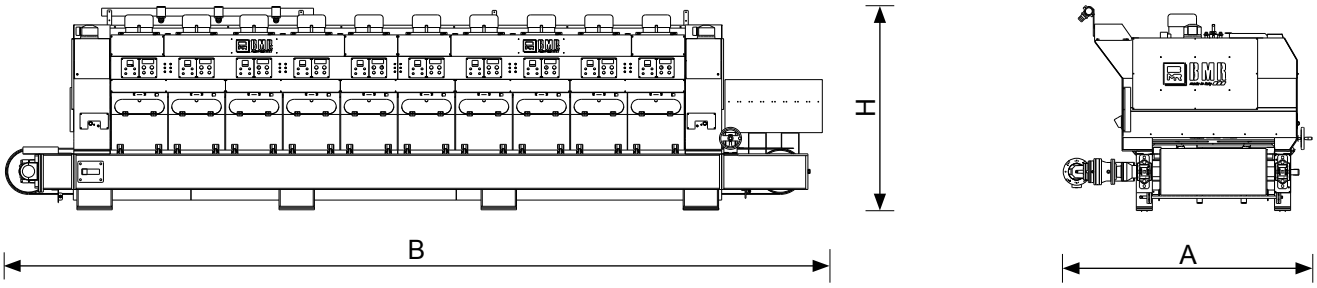

SUPERSHINE	Unidad de medida	720	1000	1200	1600
Cantidad de cabezales	**Cant.**	**10**	**10**	**10**	**10**
Dimensiones (AxBxH)	mm.	2400x9070x2200	2700x9070x2200	2900x9070x2200	3200x9070x2200
Peso máquina	Kg	11500	15800	18200	22000
Potencia total instalada	kW	165	165	165	165
Aire comprimido	l/min.	60	60	60	60
Agua	l/min.	195	195	195	195
Espesor máx.	mm.	30	30	30	30
Fto min/max	mm.	300/700	300/1000	300/1200	300/1600


Descripción del mecanizado:

Los **10 CABEZALES SATELITALES** Ø 580mm de 6 utensilios Ø 160mm, tienen las siguientes funciones:
- los primeros 7 tienen la finalidad de realizar el **EXTENDIDO Y EL PULIDO** del producto
- los 3 siguientes son de **LAVADO**
- la **REGULACIÓN AUTOMÁTICA** de la presión de los cabezales y de la **DOSIFICACIÓN** del producto METCLEAN 1006

El resultado es una garantía de **CONTINUIDAD en la CALIDAD** del producto terminado.



Cabezal satelital

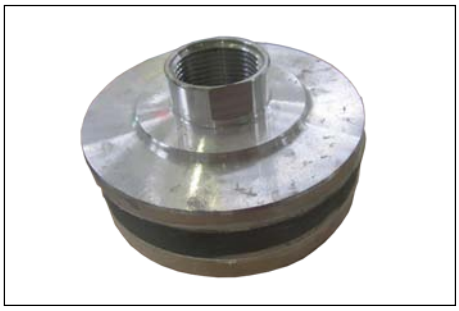

Utensilio



Bombas de dosificación del producto

PRODUCTO METCLEAN 1006

El proceso de extendido del producto METCLEAN 1006 crea una reacción química, mecánica, física que, actuando a las condiciones justas de presión y temperatura, **PENETRA EN PROFUNDIDAD EN LOS POROS DEL AZULEJO** regalándole **BRILLO, PROTECCIÓN A PRUEBA DE PISADAS Y ATAQUES DE ÁCIDO.**

METCO R&D

Revision 1
dated January 27, 2014

METCLEAN 1006
Surface treating agent

DESCRIPTION
Metclean 1006 is a water based product containing a modified silica as active ingredient.
Metclean 1006 is particularly suitable for filling the pores and imparting anti-acid properties to polished or lapped ceramic wares.
Surfaces treated with Metclean 1006 show high gloss, improved resistance to stain and easy-to-clean properties.
Metclean 1006 secures a semi-permanent finishing to treated surfaces.

APPLICATION
Metclean 1006 should be used undiluted on perfectly clean and dry surfaces.
The product is applied dropwise by the machine as lubricating agent in lapping phase.
The amount of Metclean 1006 to be used for each application is about 80 gr/m^2.
Shake well before use.

PERFORMANCE TEST
The assessment of the resistance to stains should be carried out on perfectly dry treated surfaces, normally 24h after the application of the product.

TECHNICAL INFORMATION

Appearance:	Pale liquid
Odour:	light
Solid residue:	15,0 – 25,0%
pH:	1,4 – 2,4
Density:	1,08 – 1,13g/cm^3

STORAGE CONDITIONS

Shelf life:	12 months in the sealed original containers
Storage temp.:	5°- 45°C

Store in the original containers in a dry, cool and well ventilated area. Keep away from direct sunlight or other sources of heat.
The product forms gels when exposed to air. After opening, use the product within a short period.

SAFETY
Metclean 1006 is intended for industrial use. The usual precautions used for chemical products should be respected. Good general and local ventilation of working areas is suggested. Local aspiration on the workplaces is recommended.
Please, refer to the Safety Data Sheet for additional information

PACKAGING
Kg 25 – Plastic cans
Kg 500 – Plastic tanks
Kg 1000 – Plastic tanks

METCO SRL
via Galilei, 4 – 40050 Monteveglio (BO) – ITALY
Ph. +39 (0) 51 83 03 93 - Fax +39 (0) 51 83 00 66
VAT No. / 02174841201 - REA BO 441387 - CAP. SOC. € 1.450.000 i.v.
www.metcoitalia.com / info@metco.it



Brillantez superior a 90 Gloss



Resistente al desgaste



Antiácido



Antiácido